



Trunk Lid Liner Installation Instructions

906-400 Red "Roadster" Script	Miata 90-97	906-404 Silver "Roadster" Script	Miata 99-05
906-401 Red "Roadster" Script	Miata 99-05	906-405 Silver "Roadster" Script	Miata 06-15
906-402 Red "Roadster" Script	Miata 06-15	906-406 Plain (No Script)	Miata 90-97
906-403 Silver "Roadster" Script	Miata 90-97	906-407 Plain (No Script)	Miata 99-05
906-408 Plain (No Script)		Miata 06-15	

440 Rutherford St. Goleta, CA 93117
1-800-642-8295 • FAX 805-692-2525 • www.MossMiata.com

Tools Required

- Pair of scissors
- Tape measure
- Rubbing alcohol
- Clean towel
- Razor blade
- Electrical tape

Now open the trunk and wipe the dirt and grime from the underside of the trunk lid using rubbing alcohol and a clean towel.

Remove the protective backing and apply two of the long Velcro pieces (4 inch) to each of the three reinforcing ribs or braces on the inner surface of the trunk lid as shown in Figure 1.

Contents of the Kit

Open the packaging. Inside, there should be the trunk lid liner, about 36 inches of single-sided Velcro material and these instructions.

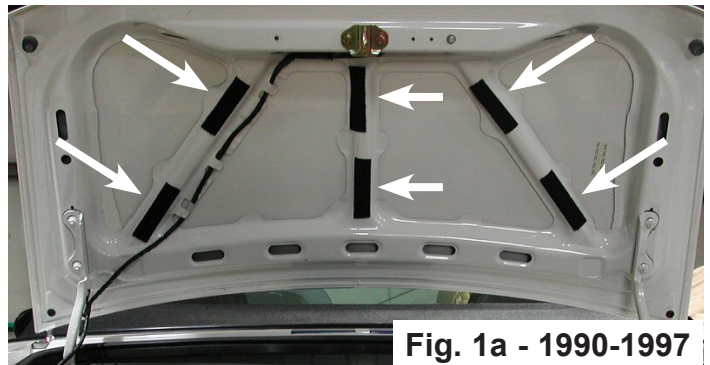


Fig. 1a - 1990-1997

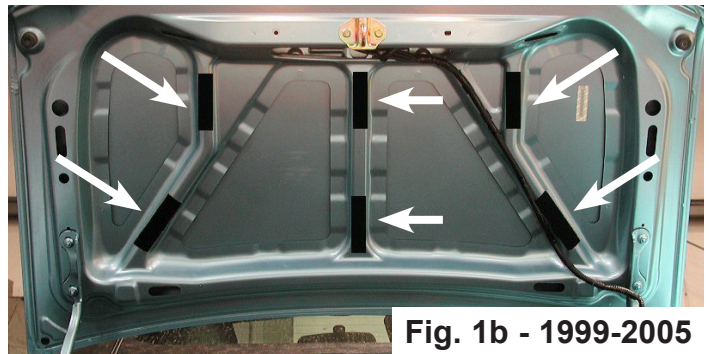


Fig. 1b - 1999-2005

Instructions 1990-2005

- 1) Wait to open the trunk until after everything is prepared. This will minimize the drain on the battery for those of you with trunk lid accessory lights.



Use the pair of scissors to cut the Velcro into six pieces 4 inches long and six pieces 2 inches long. We will refer to the 4 inch pieces as the "long" pieces, and the 2 inch pieces as the "short" pieces.

Press the sticky backing of the Velcro pieces into place with your fingers. Press hard and evenly.

Note that the pressure sensitive adhesive on the Velcro tape will take a few days to fully cure.

Installation Instructions

- 2) Remove the protective backing and apply three of the short Velcro pieces (2 inch) on the inner surface of the trunk lid as shown in Figure 2.

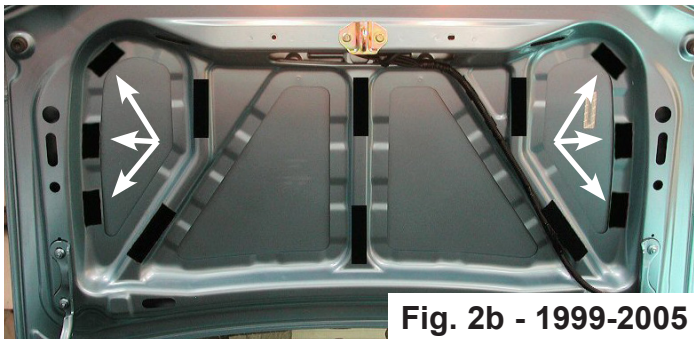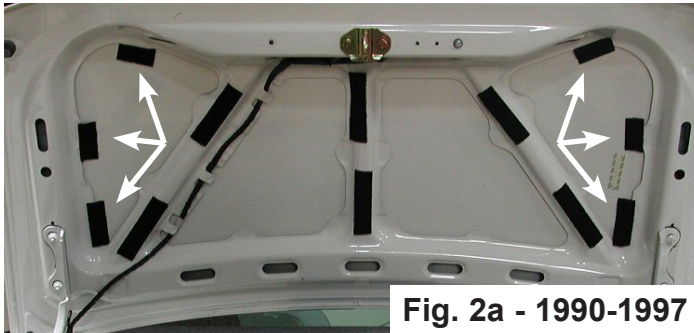

As shown in Figure 5a, on 2006-2013 cars, place the velcro around the outer rib of the trunk lid.

- 3) 1999-2005 owners may need to adjust the wiring harness from one side of the hold down to the other. Use a razor blade to carefully cut the loom away from the hold down. Remove the old electrical tape. Move the harness to the back side of the hold down and re-tape it in place. See Figure 3.



- 4) Hold the trunk lid liner in place as shown in Figure 4a., centering it left-to-right and up and down.



Press the trunk lid liner against the Velcro, pushing specifically at each Velcro location to secure the liner in place. See Figures 4b and 4c.

Installation Instructions



Fig. 4b



Fig. 4c

Note that the adhesive on the back of the Velcro tape will take a few days to fully cure.

If you are not happy with the position of the trunk lid liner, you can easily reposition it, but you must be careful because the adhesive has not yet cured. To pull the liner loose, reach behind the mat at each Velcro location and gently peel the liner away from the Velcro location with your fingers.

Instructions 2006-2015

Press the sticky backing of the Velcro pieces into place with your fingers. Press hard and evenly. Figure 5a.

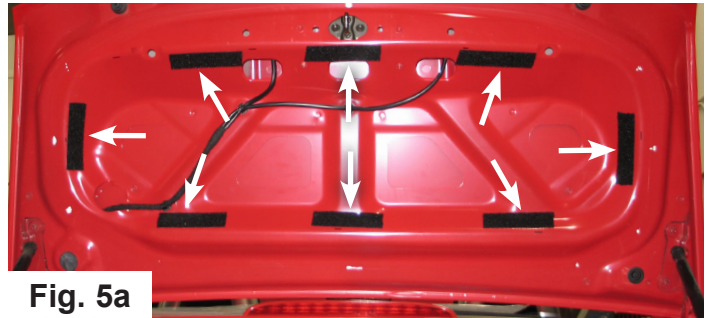


Fig. 5a

Note that the pressure sensitive adhesive on the Velcro tape will take a few days to fully cure.

The 906-402 (red "Roadster" script) and the 906-405 (silver "Roadster" script) trunk lid liners installed on a 2006 Miata. Figure 5b.



Fig. 5b

Although every effort has been made to ensure the accuracy and clarity of this information, any suggestions that you may have that will improve the information (especially detailed installation notes and photos) are welcome. These instructions were developed and written by Moss Technical Support. If you have any questions or difficulties with your installation of this product, telephone 800-667-7872 between 7:00 a.m. and 4:00 p.m., Pacific Time for assistance.

Moss Motors, Ltd.
440 Rutherford Street, Goleta, California 93117
In the US & Canada Toll Free (800) 667-7872
LOCAL (805) 681-3400 FAX (805) 692-2510



Moss Europe Ltd.
Hampton Farm Industrial Estate
Hampton Road West, Hanworth Middlesex, TW13 6DB
In the UK: 020-8867-2020 FAX:- 020-8867-2030