

## Supplemental Information & Instructions for 165-175 or GAM115 Mirror, Quarterlight

### **About the Mirror**

This mirror is intended to be secured to a RH or LH quarter light or vent window glass. However, with the mirror installed, the sidecurtain can't be used. Rubber pads are supplied and they make it possible to mount the mirrors on the metal flange on the windshield post found on many cars fitted with side curtains like the TR2-3B. Once you get to where you are going, (like a car show) the mirror can be removed if you like. This allows you to keep a car that never had a fender or door mirror fitted as original. Your new quarterlight/windshield post Mirror comes as seen here.



### **Tools Required**

3/32" Allen wrench and a 7/16" open/box end wrench

### **Installation**

Remove the 7/16" dome nut, lock washer. (2a)

Remove the shield. (2b)

*This will expose the two Allen screws.*

Loosen the two Allen screws. (3a)


Remove the metal shim (3c) and the two rubber pads (3d).

If mounting on the vent window glass, you may find that only one, or in some cases, neither of the rubber pads will fit

**IMPORTANT: Always use the metal shim. Never allow the Allen screws to directly contact the glass. If they touch the glass and the screws are tightened, you will break the glass.**

If mounting to a thin metal flange (some cars with side curtains) use both the metal shim and the two rubber pads.

***This is by its very nature, a temporary installation.  
Check the tightness of the Allen screws and the dome nut frequently.***

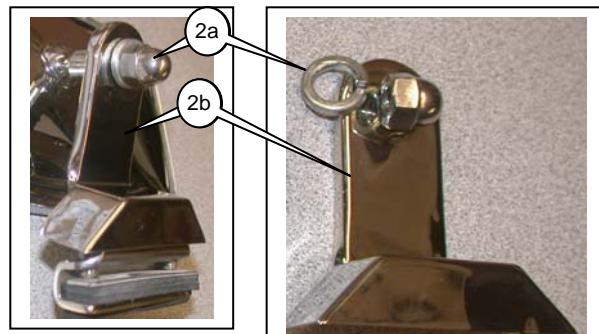

**Moss Motors, Ltd.**

440 Rutherford Street, Goleta, California 93117

In the US & Canada Toll Free (800) 667-7872 FAX (805) 692-2510 (805) 681-3400

**Moss Europe Ltd.**

Hampton Farm Industrial Estate, Hampton Road West, Hanworth Middlesex, TW13 6DB

In the UK: 020-8867-2020 FAX:- 020-8867-2030